

HVAC120-EMERGENCY HVAC SHUT-DOW

Pilla Electrical Products, Inc.



DESCRIPTION:

Maintained, push-pull mushroom operator, 40mm dia. red, with engraved white lettering: "PULL TO RESET"


Bold luminous legends.

External mounting feet top & bottom.

NEMA 4, 4X, 12.

Contact block capacity:

for standard depth 1-3 per station, for XD version 6 per station.

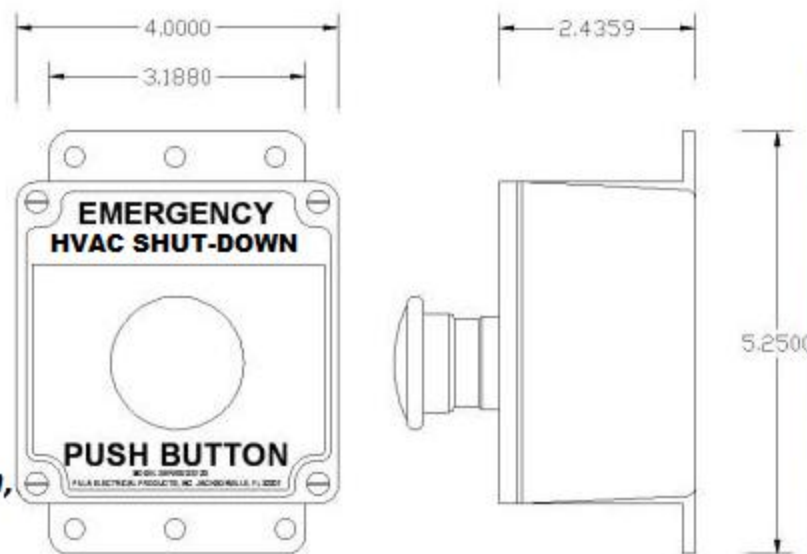

HVAC120IL



HVAC120CLM



HVAC120RP



PILNOCB



PILNCCB

RATED OPERATIONAL CHARACTERISTICS CONFORMING TO EC/EN 60947-5-1

AC SUPPLY:
UTILIZATION CATEGORY AC-15

DC SUPPLY:
UTILIZATION CATEGORY DC-13

STANDARD BLOCKS (SINGLE OR DOUBLE) WITH SCREW CLAMP TERMINALS:
A600: Ue=600Vac AND Ie=1.2 A OR Ue=240 Vac AND Ie= 3 A
OR Ue = 120 Vac AND Ie = 6 A
CONTINUOUS THERMAL CURRENT 10 A

STANDARD SINGLE OR DOUBLE BLOCKS WITH SCREW CLAMP TERMINALS:
Q600: Ue= 600VdC AND Ie = 0.1 A

24 Vdc


0.5 A

AVAILABLE OPTIONS:

HVAC120GM

Guard for (standard) type MP and optional suffix TW/KR/MO 40mm mushroom operator, lockable

(RED METAL GUARD)



HVAC120 with PILCLHCOV1

One Clear Hinged Cover fits all one device/push button model series and one-two device/Power Control series, provision for padlock/seal



HVAC 120MO

Momentary 40mm mushroom model



HVAC120KR

Key Release 40mm mushroom model with two keys, key required to reset.



HVAC120GM(y)


Guard for (standard) type MP and optional suffix TW/KR/MO 40mm mushroom operator, lockable

(YELLOW NONMETALLIC GUARD)




HVAC120TW

Maintained "TURN TO RESET" 40mm mushroom model



HVAC120MDYCLM-30


Switch 12 A @ 120V AC
10 V @ 24v DC
(pilot duty-inductive loads).
Start/Stop Motors:
1.5 PH @ 120V AC
3PH @ 240V AC
10A FLA/60A LRA @ 24V DC.
Available in N.O. or N.C. configuration.
Terminals accept up to 10 AWG wires.



UL LISTED 9F36 (CANADA)

HVAC120XD

Extra depth option: Capacity 6 single pole contact block.
Extra depth version type MP(standard), also available for all optional suffix TW/KR/MO.



			
RATED OPERATIONAL CHARACTERISTICS CONFORMING TO EC/EN 60947-5-1	AC SUPPLY: UTILIZATION CATEGORY AC-15	STANDARD BLOCKS (SINGLE OR DOUBLE) WITH SCREW CLAMP TERMINALS: A600: Ue=600Vac AND Ie=1.2 A OR Ue=240 Vac AND Ie= 3 A OR Ue = 120 Vac AND Ie = 6 A CONTINUOUS THERMAL CURRENT 10 A	
	DC SUPPLY: UTILIZATION CATEGORY DC-13	24 Vdc	0.5 A