

ST120PB-EMERGENCY POWER-OFF

Pilla Electrical Products, Inc.



DESCRIPTION:


Maintained, push-pull mushroom operator, 40mm dia. red, with engraved white lettering: "PULL TO RESET"

Bold luminous legends. External mounting feet top & bottom.

NEMA 4, 4X, 12.

Contact block capacity:

for standard depth 1-3 per station, for XD version 6 per station.

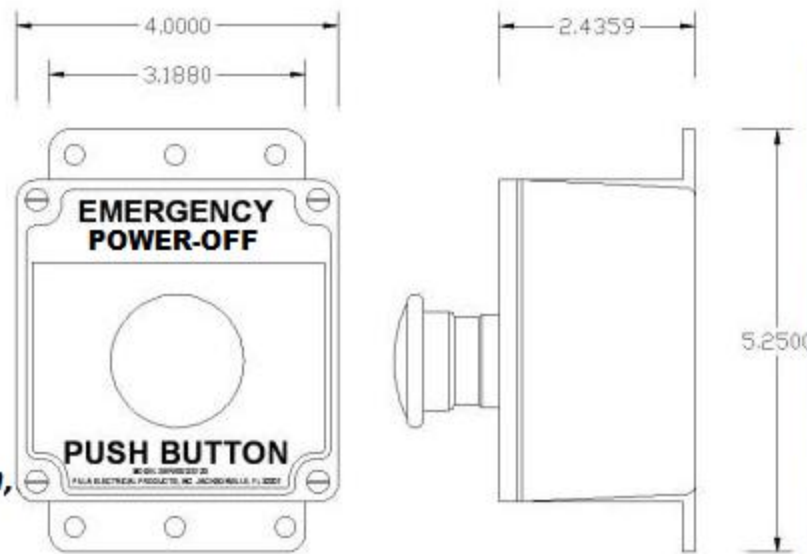

ST120PBIL



ST120PBCLM



ST120PBRP



PILNOCB



PILNCCB

RATED OPERATIONAL CHARACTERISTICS CONFORMING TO EC/EN 60947-5-1

AC SUPPLY:
UTILIZATION CATEGORY AC-15

DC SUPPLY:
UTILIZATION CATEGORY DC-13










STANDARD BLOCKS (SINGLE OR DOUBLE) WITH SCREW CLAMP TERMINALS:
A600: $U_e=600\text{Vac}$ AND $I_e=1.2\text{ A}$ OR $U_e=240\text{ Vac}$ AND $I_e=3\text{ A}$
OR $U_e=120\text{ Vac}$ AND $I_e=6\text{ A}$
CONTINUOUS THERMAL CURRENT 10 A



STANDARD SINGLE OR DOUBLE BLOCKS WITH SCREW CLAMP TERMINALS:
Q600: $U_e=600\text{VdC}$ AND $I_e=0.1\text{ A}$

24 Vdc

0.5 A

AVAILABLE OPTIONS:

<p>ST120PBGM</p> <p>Guard for (standard) type MP and optional suffix TW/KR/MO 40mm mushroom operator, lockable</p> <p>(RED METAL GUARD)</p>		<p>ST120PB with PILCHCOV1</p> <p>One Clear Hinged Cover fits all one device/push button model series and one-two device/Power Control series, provision for padlock/seal</p>	
<p>ST120PBMO</p> <p>Momentary 40mm mushroom model</p>		<p>ST120PBKR</p> <p>Key Release 40mm mushroom model with two keys, key required to reset.</p>	
<p>ST120PBGM(y)</p> <p>Guard for (standard) type MP and optional suffix TW/KR/MO 40mm mushroom operator, lockable</p> <p>(YELLOW NONMETALLIC GUARD)</p>		<p>ST120PBTW</p> <p>Maintained "TURN TO RESET" 40mm mushroom model</p>	
<p>ST120PBMDYCLM-30</p> <p>Switch 12 A @ 120V AC 10 V @ 24v DC (pilot duty-inductive loads). Start/Stop Motors: 1.5 PH @ 120V AC 3PH @ 240V AC 10A FLA/60A LRA @ 24V DC. Available in N.O. or N.C. configuration. Terminals accept up to 10 AWG wires.</p> 		<p>ST120PBXD</p> <p>Extra depth option: Capacity 6 single pole contact block. Extra depth version type MP(standard), also available for all optional suffix TW/KR/MO.</p>	

	<p>PILNCCB</p> 	<p>PILNOCB</p> 	
<p>RATED OPERATIONAL CHARACTERISTICS CONFORMING TO EC/EN 60947-5-1</p>	<p>AC SUPPLY: UTILIZATION CATEGORY AC-15</p>	<p>STANDARD BLOCKS (SINGLE OR DOUBLE) WITH SCREW CLAMP TERMINALS: A600: Ue=600Vac AND Ie=1.2 A OR Ue=240 Vac AND Ie= 3 A OR Ue = 120 Vac AND Ie = 6 A CONTINUOUS THERMAL CURRENT 10 A</p>	
	<p>DC SUPPLY: UTILIZATION CATEGORY DC-13</p>	<p>STANDARD SINGLE OR DOUBLE BLOCKS WITH SCREW CLAMP TERMINALS: Q600: Ue= 600VdC AND Ie = 0.1 A</p>	<p>24 Vdc</p> <p>0.5 A</p>