



HL800SSMOM

Pilla Electrical Products, Inc.

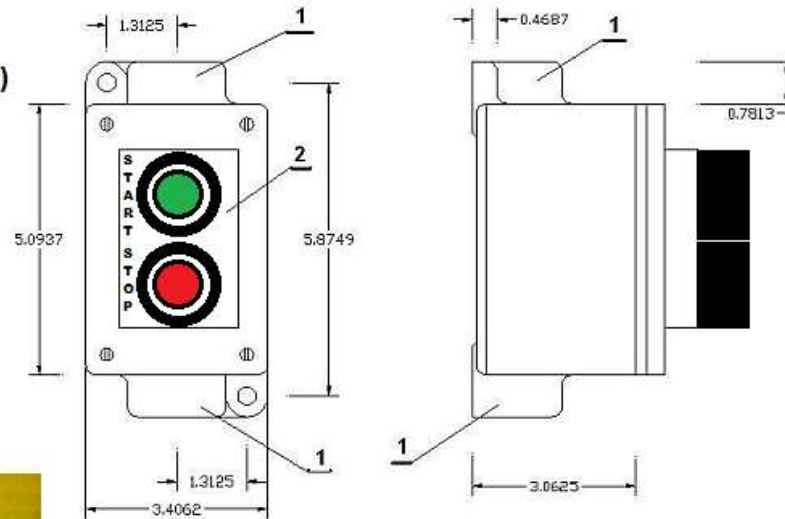

TYPE 7-9
MOMENTARY ROUND BUTTONS
GREEN START
RED STOP
INCLUDES INTERNAL CONTACTS



CONTACTS RATED 10AMP @ 120V, 600 max.
HUB SIZE 3/4" FIT THRU TOP AND BOTTOM

- AVAILABLE LEGENDS:**
- EMERGENCY POWER OFF (STANDARD)
 - HVAC SHUT-DOWN
 - EMERGENCY SHUT-OFF
 - EMERGENCY SHUT-DOWN
 - BOILER SHUT-DOWN
 - EMERGENCY GAS SHUT-OFF
 - EMERGENCY STOP
 - VENTILATION START
 - VENTILATION STOP
 - CHILLER STOP



HL800SSMOM/COV

- Cl. I, Div. 1&2, Groups B ,C, D Explosionproof
- Cl. II, Div. 1, Groups E, F, G Dust-ignitionproof
- Cl. II, Div 2, Groups F, G Raintight
- Cl. III Wet Location

FACTORY SEALING

Factory sealed push and selector switch control stations do not need external sealing. Device contacts are factory sealed in explosionproof contact blocks , Enclosures have finally ground wide flanges on both the body and cover for a flame



HL800SSMOM